

5A USB 彩屏测试仪说明书

Tip: English manual in the next few pages

型号: ZK-UT



技术指标

产品型号: ZK-UT

测量电压: 3.70V~30.00V

测量电流: 0.000~5.000A

容量测量范围: 0~99999mAh

能量测量范围: 0~99999mWh

负载阻抗测量范围: 0.5~999.9Ω

温度测量范围: 0~80°C

工作温度范围: 0~70°C

产品尺寸: 64mm*22mm*11mm

时间测量范围: 00:00:00~99:59:59,最高100小时

快充识别模式: QC2.0、QC3.0、APPLE2.4A/2.1A/1A/0.5A、Android DCP、SAMSUNG AFC、华为FCP、华为SCP

显示屏幕: 0.96寸IPS彩色液晶显示屏

电压测量分辨率: 0.01V

电流测量分辨率: 0.001A

电压测量精度: ± (1%+2个字)

电流测量精度: ± (2%+2个字)

功率测量范围: 0~150W

温度测量误差: ±3°C

数据刷新频率: 2Hz,实时显示

含包装重量: 28g

一屏显示，简洁直观



按键操作：

- 1.单击—容量、能量、时间统计暂停；
- 2.长按>2s松开—容量、能量、时间清零；
- 3.长按>5s——屏幕自动翻转180°

背部按键



5A USB color display tester manual

MODE: ZK-UT



Technical indicators

Model: ZK-UT

Display screen: 0.96 inch IPS color LCD display

Voltage measurement range: 3.70V~30.00V

Voltage measurement resolution: 0.01V

Current measurement range: **0.000~5.000A**

Current measurement resolution: 0.001A

Capacity measurement range: 0~99999mAh

Voltage measurement accuracy: $\pm (1\% + 2 \text{ words})$

Energy measurement range: 0~99999mWh

Current measurement accuracy: $\pm (2\% + 2 \text{ words})$

Load impedance measurement range: 0.5~999.9Ω

Power measurement range: 0~150W

Temperature measurement range: 0~80°C

Temperature measurement error: $\pm 3^\circ \text{ C}$

Range of working temperature: 0~70°C

Data refresh rate: 2Hz, real-time display

SIZE: 64mm*22mm*11mm


Package weight: 28g

Time measurement range: **00:00:00~99:59:59, Up to 100 hours**

Fast charge recognition mode: QC2.0, QC3.0, APPLE2.4A/2.1A/1A/0.5A, Android DCP,

SAMSUNG AFC, Huawei FCP, Huawei SCP

One screen display, simple and intuitive

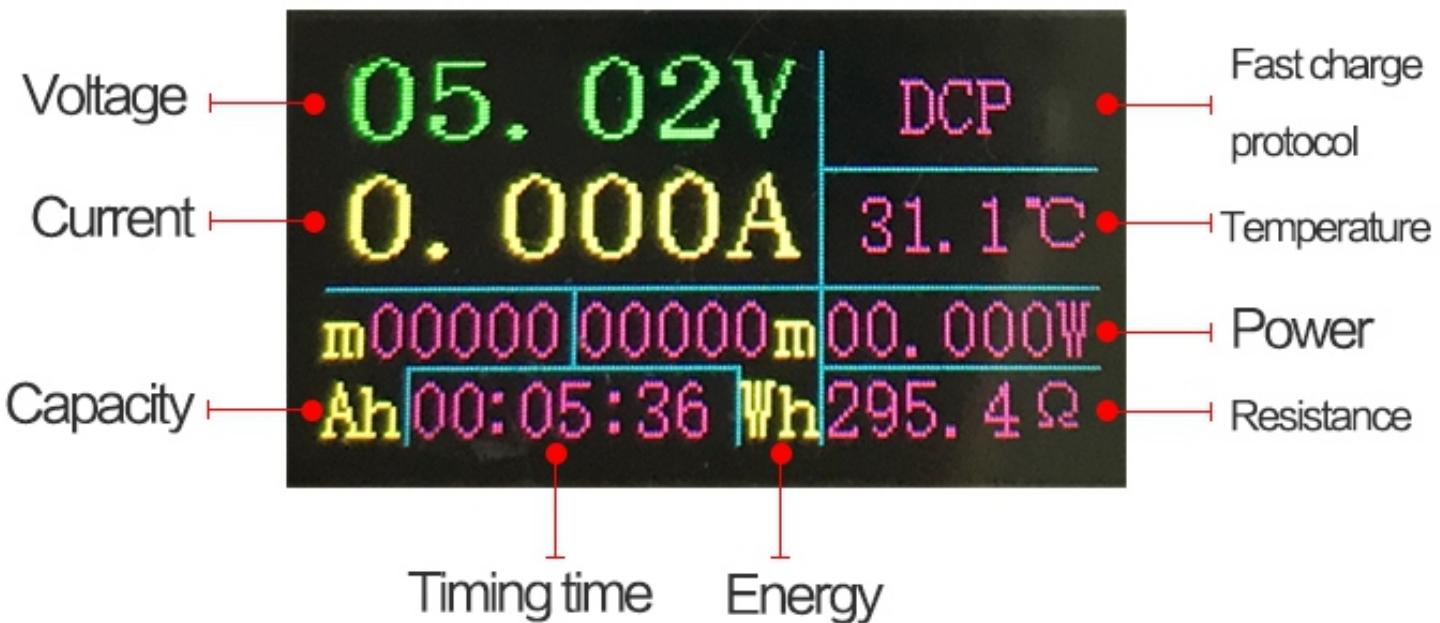

Key operation:

1. Click -- capacity, energy, time statistics pause;
2. Long press > 2s to release – capacity, energy, time clear;
3. Long press > 5s – the screen automatically flips 180°

